

# *QuickTap*

## Telephone Handset Tap



## User Guide


---

**JK Audio**

## Connection

Install QuickTap between the handset and the telephone base of your existing telephone.

1. Unplug the handset cord from your telephone base.
2. Using the black handset jumper cord that we have provided, connect the telephone jack of QuickTap to the handset jack on your telephone base.
3. Plug your handset cord, and handset, into the handset jack on QuickTap.
4. Connect your audio equipment to the line output jack on QuickTap.

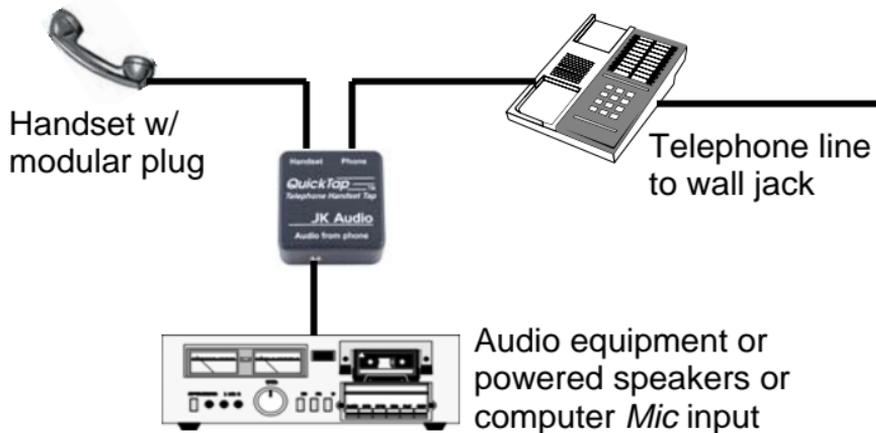

## ***Operation***

The Output Jack provides a mix of both sides of the conversation. In other words, whatever you send down the phone line will come back on this jack mixed with the audio from the other side of the call.

Two adapter cables are supplied with the QuickTap. One cable has 1/8" mono connectors on each end. This cable can be used to connect QuickTap to the line input on some powered speakers.

The second cord has a 1/8" stereo plug on one end and an RCA mono plug on the other end. The RCA plug is wired to the tip or left channel of the stereo plug. The ring or right channel is not connected. Use this cable to connect QuickTap to powered speakers or amplifiers equipped with RCA jacks.

## **FAQ's**

### **? Will the QuickTap work with my telephone?**

**!** The QuickTap will work with virtually any telephone that is not cellular and does not have a keypad in the handset. It is compatible with analog, digital, PBX, and ISDN telephones and systems. We cannot guarantee that it will work with every telephone out there, but we have yet to hear of one it does not work with.

### **? How do I get both of my powered speakers to work with the QuickTap?**

**!** You will need to get a mono to stereo converter to go between the speakers and the QuickTap. These are readily available at most electronic stores.

### **? The QuickTap works great for recording conversations but how do I send a recording down the telephone line?**

**!** The QuickTap is a receive only device. If you want to send recorded audio down the line, you should purchase a THAT-1, THAT-2 or a Voice Path.

## ***Specifications***

Line Output Connector	1/8" Mono jack
Output Impedance	600 ohms
Output Level	100 mV RMS
Isolation	1500 VRMS

Handset and Telephone connectors:  
Modular 4pin/4wire handset jacks

Compatibility Note: Not all telephones are built alike so we cannot guarantee QuickTap will work with any handset design out there. We designed QuickTap to work with most popular telephones.

QuickTap is not for use with cellular phones or telephones that have a keypad built into the handset.

## ***FCC Registration***

Your new JK Audio product has been registered with the Federal Communications Commission (FCC). This product complies with the standards in Part 68 of the FCC rules. The FCC requires us to provide the following information:

### **1. Connection and use with the nationwide telephone network**

The FCC requires that you connect this telephone equipment to the national telephone network through a FCC registered telephone.

This equipment may not be used with Party Line Service or Coin Telephone Lines.

### **2. Information for the telephone company**

Upon request from your local telephone company, you are required to provide the following information:

- a) The "line" to which you will connect the telephone equipment (that is, your telephone number), and
- b) The telephone equipment's FCC registration number. This can be found on the bottom of your telephone equipment.

### **3. Repair Instructions**

If it is determined that your telephone equipment is malfunctioning, the FCC requires that it not be used and that it be unplugged from the modular outlet until the problem has been corrected.

## ***FCC Registration (continued)***

**Repairs to this telephone equipment can only be made by the manufacturer or its authorized agents or by others who may be authorized by the FCC. For repair procedures, follow the instructions outlined under the warranty section of the manual.**

### **4. Rights of the telephone company**

If telephone equipment is causing harm to the network, the telephone company may temporarily discontinue your telephone service. If possible, they will notify you before they interrupt service. If advanced notice is not practical, you will be notified as soon as possible. You will be given the opportunity to correct the problem, and you will be informed of your right to file a complaint with the FCC.

Your telephone company may make changes in its facilities, equipment, operations or procedures that could affect the proper functioning of your JK Audio product. If such changes are planned, you will be notified.

If this telephone equipment is to be used with a telephone that is leased or owned by another party, permission to connect this telephone equipment to their telephone must first be obtained.

## **Warranty**

The model QuickTap is covered by a 2 year warranty to be free from defective workmanship and materials. In the event that the QuickTap needs repair, you must call us to get an authorization, and then carefully pack and ship it to us. You will pay for shipping to us and we will pay for return back to you, UPS ground. No free repairs will be made if the defect was caused by misuse, weather conditions, or other cause, except for defective workmanship or materials. THERE ARE NO EXPRESSED OR IMPLIED WARRANTIES WHICH EXTEND BEYOND THE WARRANTY HERE MADE.

06/06

---

JK Audio, Inc. 1311 E 6th Street, Sandwich, IL 60548 USA

Voice: (815) 786-2929 Toll Free: 800-JK-Audio

Fax: 815-786-8502

Info@jkaudio.com [www.jkaudio.com](http://www.jkaudio.com)

Copyright © 2006 JK Audio, Inc. All Rights Reserved.